

CATALOGUE **2025**

# MASONMATE®

FIXINGS FOR MASONRY

## CONTENTS

|                           |    |
|---------------------------|----|
| Through Bolts             | 4  |
| Sleeve Anchors            | 5  |
| Shield Anchors            | 6  |
| Concrete Screwbolts       | 8  |
| Concrete Frame Screws     | 11 |
| Drop In Wedge Anchors     | 12 |
| Rubber Nuts               | 13 |
| Polyester Resin           | 14 |
| Vinylester Resin          | 14 |
| Resin Accessories         | 15 |
| Resin Capsules            | 16 |
| Internal Threaded Sockets | 16 |
| Studs                     | 17 |
| Frame Fixings             | 18 |
| Hammer Fixings            | 18 |
| Window Frame Anchors      | 18 |
| Hollow Wall Anchors       | 19 |
| Spring Toggles            | 19 |
| Plastic Plugs             | 20 |
| Nylon Plugs               | 20 |
| Cable Ties                | 21 |

## Welcome to the Masonmate® Fixings Catalogue!

At Masonmate®, we pride ourselves on providing top-quality fixings designed to meet the diverse needs of construction professionals and DIY enthusiasts alike. Our extensive range of products ensures that you have the right tools for every job, whether you're working on a large-scale commercial project or a small home improvement task.

In this catalogue, you'll find:

**Anchors and Bolts:** Durable and reliable solutions for securing heavy loads.

**Screws and Resins:** Precision-engineered for a variety of materials and applications.

**Wall Plugs and Fixings:** Designed for maximum hold in different substrates.

We are proud to highlight that some of our ranges come with **ETA (European Technical Assessment)** and **UKTA (United Kingdom Technical Assessment)** accreditation, ensuring they meet the highest standards of quality and performance.


Each product in our catalogue is crafted with the highest standards of quality and performance in mind. We are committed to helping you achieve the best results with ease and efficiency.

Explore our catalogue and discover why Masonmate® is the trusted choice for professionals and DIYers around the world. Let's build something great together!




## INSTALLATION TIPS:


### FRAME & HAMMER FIXINGS

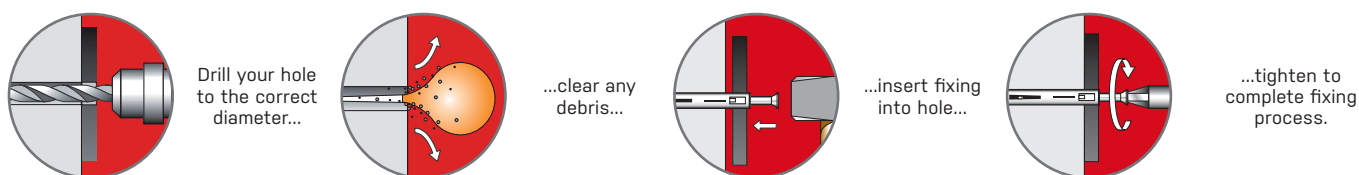


### SLEEVE ANCHORS

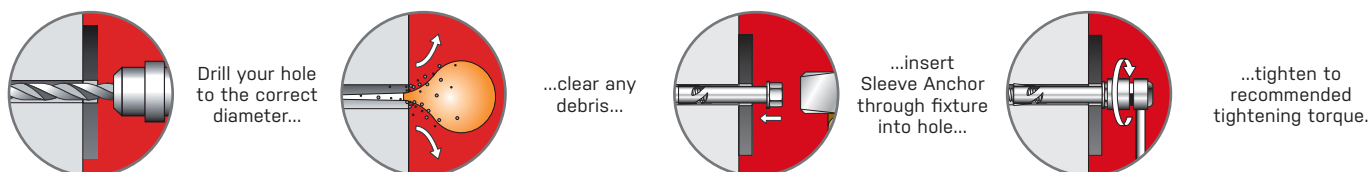


### HOLLOW WALL ANCHORS

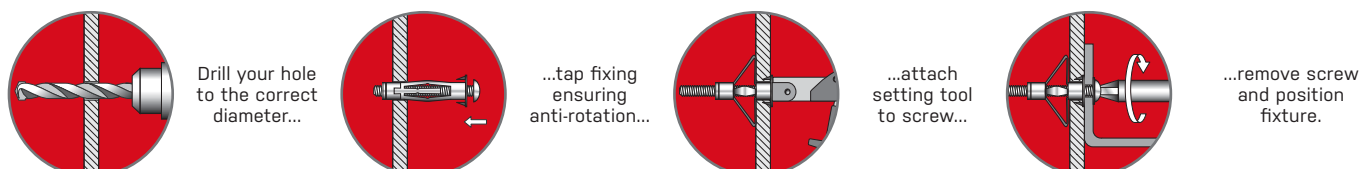


## CONCRETE SCREWBOLTS

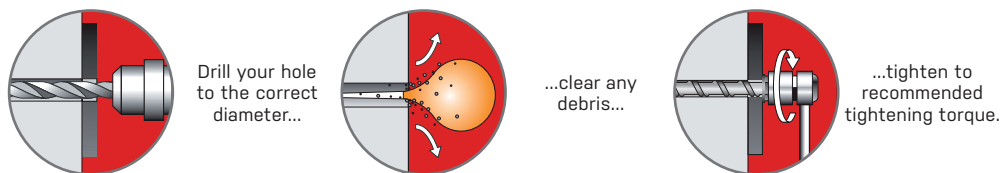


## SHIELD ANCHORS

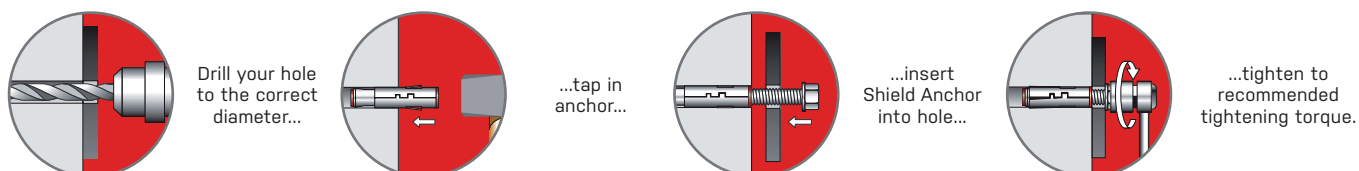

## CONCRETE FRAME SCREWS

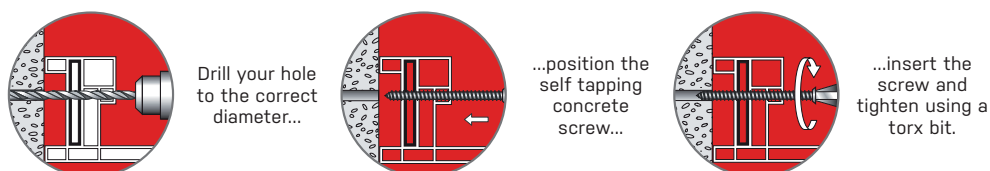


## CHEMICAL RESINS

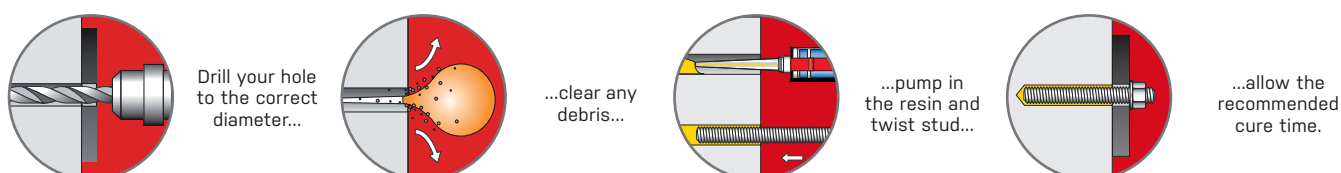

## THROUGH BOLTS



## SPIN IN CAPSULES

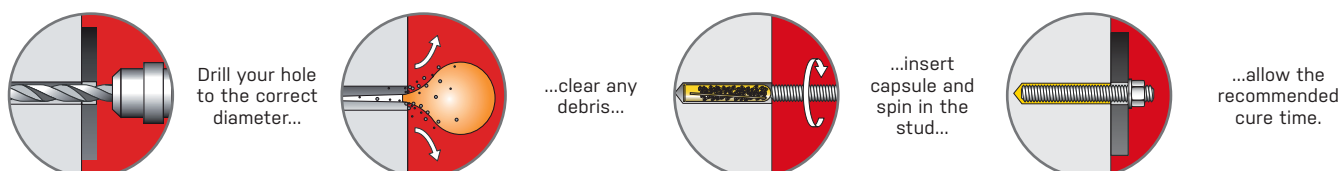

## HAMMER IN CAPSULES



## TBS // THROUGH BOLT ETA APPROVED - OPTION 7 / ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete • Solid Stone

A torque controlled anchor offering quick and easy installation, and is highly versatile.  
ETA Option 7 approved for non-cracked concrete. High strength, reliable performance and Class A1 reaction to fire.

| Product Code  | Diameter | Anchor Length (mm) | Anchor Hole Size (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Box Qty | Outer Qty |
|---------------|----------|--------------------|-----------------------|--------------------|---------------------|-------------------|-----------------|---------|-----------|
| 0841ETA540065 | M8       | 65                 | 8                     | 2                  | 53                  | 4.5               | 4.1             | 100     | 400       |
| 0841ETA540080 | M8       | 80                 | 8                     | 17                 | 53                  | 4.5               | 4.1             | 100     | 400       |
| 0841ETA540100 | M8       | 100                | 8                     | 37                 | 53                  | 4.5               | 4.1             | 100     | 400       |
| 0841ETA540120 | M8       | 120                | 8                     | 57                 | 53                  | 4.5               | 4.1             | 100     | 400       |
| 0841ETA560065 | M10      | 65                 | 10                    | -                  | 58                  | 5.2               | 6.6             | 100     | 400       |
| 0841ETA560075 | M10      | 75                 | 10                    | 4                  | 58                  | 5.2               | 6.6             | 100     | 400       |
| 0841ETA560090 | M10      | 90                 | 10                    | 19                 | 58                  | 5.2               | 6.6             | 50      | 200       |
| 0841ETA560095 | M10      | 95                 | 10                    | 24                 | 58                  | 5.2               | 6.6             | 50      | 200       |
| 0841ETA560120 | M10      | 120                | 10                    | 49                 | 58                  | 5.2               | 6.6             | 50      | 200       |
| 0841ETA560130 | M10      | 130                | 10                    | 59                 | 58                  | 5.2               | 6.6             | 50      | 200       |
| 0841ETA580080 | M12      | 80                 | 12                    | -                  | 80                  | 9.5               | 9.6             | 50      | 200       |
| 0841ETA580100 | M12      | 100                | 12                    | 3                  | 80                  | 9.5               | 9.6             | 50      | 200       |
| 0841ETA580120 | M12      | 120                | 12                    | 23                 | 80                  | 9.5               | 9.6             | 25      | 100       |
| 0841ETA580140 | M12      | 140                | 12                    | 43                 | 80                  | 9.5               | 9.6             | 25      | 100       |
| 0841ETA580150 | M12      | 150                | 12                    | 53                 | 80                  | 9.5               | 9.6             | 25      | 100       |
| 0841ETA580180 | M12      | 180                | 12                    | 83                 | 80                  | 9.5               | 9.6             | 25      | 100       |
| 0841ETA620105 | M16      | 105                | 16                    | -                  | 99                  | 10.3              | 17.9            | 25      | 100       |
| 0841ETA620125 | M16      | 125                | 16                    | 4                  | 99                  | 10.3              | 17.9            | 20      | 80        |
| 0841ETA620140 | M16      | 140                | 16                    | 19                 | 99                  | 10.3              | 17.9            | 20      | 80        |
| 0841ETA620150 | M16      | 150                | 16                    | 29                 | 99                  | 10.3              | 17.9            | 20      | 80        |
| 0841ETA620180 | M16      | 180                | 16                    | 59                 | 99                  | 10.3              | 17.9            | 20      | 80        |
| 0841ETA620220 | M16      | 220                | 16                    | 99                 | 99                  | 10.3              | 17.9            | 15      | 60        |
| 0841ETA640125 | M20      | 125                | 20                    | -                  | 110                 | 19.0              | 28.0            | 15      | 60        |
| 0841ETA640160 | M20      | 160                | 20                    | 24                 | 110                 | 19.0              | 28.0            | 10      | 40        |
| 0841ETA640200 | M20      | 200                | 20                    | 64                 | 110                 | 19.0              | 28.0            | 10      | 40        |
| 0841ETA640220 | M20      | 220                | 20                    | 84                 | 110                 | 19.0              | 28.0            | 10      | 40        |
| 0841ETA640300 | M20      | 300                | 20                    | 144                | 110                 | 19.0              | 28.0            | 5       | 20        |

## THROUGH BOLT DRY GALVANISED



The perfect anchor for use in:  
Concrete • Solid Stone

A torque controlled anchor offering quick and easy installation, and is highly versatile.  
Dry Galvanised finish makes it corrosion-resistant and suitable for external and wet conditions, comes with an A2 Stainless Steel clip.

| Product Code | Diameter | Anchor Length (mm) | Anchor Hole Size (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Box Qty | Outer Qty |
|--------------|----------|--------------------|-----------------------|--------------------|---------------------|-------------------|-----------------|---------|-----------|
| 0841M540050G | M8       | 50                 | 8                     | 5                  | 45                  | 2.8               | 3.2             | 100     | 600       |
| 0841M540075G | M8       | 75                 | 8                     | 10                 | 65                  | 2.8               | 3.2             | 100     | 500       |
| 0841M540095G | M8       | 95                 | 8                     | 30                 | 65                  | 2.8               | 3.2             | 100     | 400       |
| 0841M540120G | M8       | 120                | 8                     | 55                 | 65                  | 2.8               | 3.2             | 50      | 300       |
| 0841M560060G | M10      | 60                 | 10                    | 10                 | 50                  | 4.3               | 5.8             | 50      | 300       |
| 0841M560085G | M10      | 85                 | 10                    | 10                 | 70                  | 4.3               | 5.8             | 50      | 200       |
| 0841M560105G | M10      | 105                | 10                    | 30                 | 70                  | 4.3               | 5.8             | 50      | 200       |
| 0841M560125G | M10      | 125                | 10                    | 50                 | 70                  | 4.3               | 5.8             | 25      | 150       |
| 0841M580085G | M12      | 85                 | 12                    | 10                 | 80                  | 6.8               | 7.2             | 25      | 150       |
| 0841M580100G | M12      | 100                | 12                    | 15                 | 90                  | 6.8               | 7.2             | 25      | 150       |
| 0841M580115G | M12      | 115                | 12                    | 20                 | 90                  | 6.8               | 7.2             | 25      | 100       |
| 0841M580145G | M12      | 145                | 12                    | 50                 | 90                  | 6.8               | 7.2             | 25      | 100       |
| 0841M580180G | M12      | 180                | 12                    | 85                 | 90                  | 6.8               | 7.2             | 25      | 100       |
| 0841M620110G | M16      | 110                | 16                    | 15                 | 90                  | 8.0               | 10.4            | 20      | 80        |
| 0841M620125G | M16      | 125                | 16                    | 10                 | 110                 | 8.0               | 10.4            | 15      | 60        |
| 0841M620150G | M16      | 150                | 16                    | 30                 | 110                 | 8.0               | 10.4            | 15      | 60        |
| 0841M620200G | M16      | 200                | 16                    | 80                 | 110                 | 8.0               | 10.4            | 10      | 40        |
| 0841M640170G | M20      | 170                | 20                    | 35                 | 130                 | 10.8              | 14.0            | 5       | 30        |
| 0841M640220G | M20      | 220                | 20                    | 75                 | 130                 | 10.8              | 14.0            | 5       | 20        |
| 0841M640280G | M20      | 280                | 20                    | 135                | 130                 | 10.8              | 14.0            | 5       | 20        |

## HEXAGON NUT SLEEVE ANCHOR ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick • Stone

A thin walled anchor, for use in fixing most types of masonry or concrete.  
When the bolt is tightened, the expansion sleeve expands against the substrate creating a strong bond, securing everything in place.

| Product Code | Diameter | Length (mm) | Anchor Hole Size (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Box Qty | Outer Qty |
|--------------|----------|-------------|-----------------------|--------------------|---------------------|-------------------|-----------------|---------|-----------|
| 0839M460027  | M6       | 56          | 6                     |                    |                     |                   |                 | 100     | 1,000     |
| 0839M490009  | M8       | 40          | 8                     | 12                 | 40                  | 3.19              | 3.90            | 100     | 800       |
| 0839M490035  | M8       | 65          | 8                     | 37                 | 40                  | 3.19              | 3.90            | 50      | 500       |
| 0839M490060  | M8       | 85          | 8                     | 57                 | 40                  | 3.19              | 3.90            | 50      | 500       |
| 0839M540009  | M10      | 50          | 10                    | 12                 | 45                  | 4.41              | 6.20            | 50      | 400       |
| 0839M540036  | M10      | 77          | 10                    | 39                 | 45                  | 4.41              | 6.20            | 50      | 300       |
| 0839M540060  | M10      | 97          | 10                    | 59                 | 45                  | 4.41              | 6.20            | 25      | 250       |
| 0839M560009  | M12      | 60          | 12                    | 15                 | 55                  | 5.88              | 7.20            | 25      | 250       |
| 0839M560022  | M12      | 75          | 12                    | 27                 | 55                  | 5.88              | 7.20            | 25      | 200       |
| 0839M560050  | M12      | 99          | 12                    | 51                 | 55                  | 5.88              | 7.20            | 25      | 150       |
| 0839M560080  | M12      | 129         | 12                    | 81                 | 55                  | 5.88              | 7.20            | 25      | 100       |
| 0839M580013  | M16      | 65          | 16                    | 20                 | 60                  | 7.84              | 8.40            | 25      | 100       |
| 0839M580055  | M16      | 111         | 16                    | 65                 | 60                  | 7.84              | 8.40            | 20      | 80        |
| 0839M580090  | M16      | 147         | 16                    | 102                | 60                  | 7.84              | 8.40            | 15      | 60        |
| 0839M620100  | M20      | 151         | 20                    | 101                | 65                  | -                 | -               | 10      | 40        |

## HEXAGON NUT SLEEVE ANCHOR A4 STAINLESS STEEL



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick • Stone

A thin walled anchor, for use in fixing most types of masonry or concrete. When the bolt is tightened, the expansion sleeve expands against the substrate creating a strong bond, securing everything in place. A4 Stainless Steel makes it corrosion-resistant and suitable for external and wet conditions.

| Product Code  | Diameter | Length (mm) | Anchor Hole Size (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Box Qty | Outer Qty |
|---------------|----------|-------------|-----------------------|--------------------|---------------------|-------------------|-----------------|---------|-----------|
| 0839M560050SS | M10      | 50          | 10                    | 10                 | 40                  | 4.41              | 6.20            | 50      | 400       |
| 0839M560075SS | M10      | 77          | 10                    | 37                 | 40                  | 4.41              | 6.20            | 50      | 300       |
| 0839M560100SS | M10      | 97          | 10                    | 57                 | 40                  | 4.41              | 6.20            | 25      | 250       |
| 0839M580060SS | M12      | 60          | 12                    | 10                 | 50                  | 5.88              | 7.20            | 25      | 250       |
| 0839M580075SS | M12      | 75          | 12                    | 25                 | 50                  | 5.88              | 7.20            | 25      | 200       |
| 0839M580100SS | M12      | 99          | 12                    | 49                 | 50                  | 5.88              | 7.20            | 25      | 150       |

## HEXAGON LOOSE BOLT SLEEVE ANCHOR ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick • Stone

A thin walled anchor, for use in fixing most types of masonry or concrete.  
When the bolt is tightened, the expansion sleeve expands against the substrate creating a strong bond, securing everything in place.

| Product Code  | Diameter | Length (mm) | Anchor Hole Size (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Box Qty | Outer Qty |
|---------------|----------|-------------|-----------------------|--------------------|---------------------|-------------------|-----------------|---------|-----------|
| 0839M540045HB | M8       | 45          | 8                     | 10                 | 35                  | 3.19              | 3.90            | 100     | 800       |
| 0839M540070HB | M8       | 70          | 8                     | 35                 | 35                  | 3.19              | 3.90            | 50      | 500       |
| 0839M540090HB | M8       | 90          | 8                     | 55                 | 35                  | 3.19              | 3.90            | 50      | 400       |
| 0839M560045HB | M10      | 45          | 10                    | 5                  | 40                  | 4.41              | 6.20            | 50      | 400       |
| 0839M560055HB | M10      | 55          | 10                    | 15                 | 40                  | 4.41              | 6.20            | 50      | 400       |
| 0839M560080HB | M10      | 80          | 10                    | 40                 | 40                  | 4.41              | 6.20            | 50      | 300       |
| 0839M560100HB | M10      | 100         | 10                    | 60                 | 40                  | 4.41              | 6.20            | 50      | 200       |
| 0839M580065HB | M12      | 65          | 12                    | 15                 | 50                  | 5.88              | 7.20            | 50      | 200       |
| 0839M580080HB | M12      | 80          | 12                    | 30                 | 50                  | 5.88              | 7.20            | 25      | 150       |
| 0839M580100HB | M12      | 100         | 12                    | 50                 | 50                  | 5.88              | 7.20            | 25      | 150       |
| 0839M620075HB | M16      | 75          | 16                    | 20                 | 55                  | 7.84              | 8.40            | 25      | 100       |
| 0839M620120HB | M16      | 120         | 16                    | 65                 | 55                  | 7.84              | 8.40            | 10      | 80        |

## LOOSE BOLT SHIELD ANCHOR ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick • Stone

The shield anchor is the most popular anchor, internally threaded for fixing into masonry and concrete. Ideal general purpose anchor bolt, suitable for variations in hole size. Anchor body grade 5.8.

| Product Code | Diameter | Length (mm) | Anchor Hole Size (mm) | Shield Length (mm) | Thread Diameter (mm) | Fastens Up To (mm) | Bolt Length (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|-----------------------|--------------------|----------------------|--------------------|------------------|---------------------|---------|-----------|
| 0865L610     | M6       | 10          | 12                    | 45                 | 6                    | 10                 | 55               | 50                  | 50      | 500       |
| 0865L625     | M6       | 25          | 12                    | 45                 | 6                    | 25                 | 70               | 50                  | 50      | 400       |
| 0865L640     | M6       | 40          | 12                    | 45                 | 6                    | 40                 | 85               | 50                  | 50      | 400       |
| 0865L810     | M8       | 10          | 14                    | 50                 | 8                    | 10                 | 65               | 55                  | 50      | 200       |
| 0865L825     | M8       | 25          | 14                    | 50                 | 8                    | 25                 | 80               | 55                  | 50      | 200       |
| 0865L840     | M8       | 40          | 14                    | 50                 | 8                    | 40                 | 95               | 55                  | 50      | 200       |
| 0865L1010    | M10      | 10          | 16                    | 60                 | 10                   | 10                 | 75               | 65                  | 25      | 150       |
| 0865L1025    | M10      | 25          | 16                    | 60                 | 10                   | 25                 | 90               | 65                  | 25      | 150       |
| 0865L1050    | M10      | 50          | 16                    | 60                 | 10                   | 50                 | 115              | 65                  | 25      | 100       |
| 0865L1075    | M10      | 75          | 16                    | 60                 | 10                   | 75                 | 140              | 65                  | 25      | 100       |
| 0865L1210    | M12      | 10          | 20                    | 75                 | 12                   | 10                 | 90               | 85                  | 20      | 80        |
| 0865L1225    | M12      | 25          | 20                    | 75                 | 12                   | 25                 | 105              | 85                  | 20      | 80        |
| 0865L1240    | M12      | 40          | 20                    | 75                 | 12                   | 40                 | 120              | 85                  | 20      | 80        |
| 0865L1260    | M12      | 60          | 20                    | 75                 | 12                   | 60                 | 140              | 85                  | 20      | 80        |
| 0865L1615    | M16      | 15          | 25                    | 115                | 16                   | 15                 | 135              | 125                 | 10      | 40        |
| 0865L1630    | M16      | 30          | 25                    | 115                | 16                   | 30                 | 150              | 125                 | 5       | 30        |
| 0865L1660    | M16      | 60          |                       |                    |                      |                    |                  |                     | 5       | 30        |

## EYE BOLT SHIELD ANCHOR ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick • Stone

The shield anchor is the most popular anchor, internally threaded for fixing into masonry and concrete. Ideal general purpose anchor bolt, suitable for variations in hole size. Anchor body grade 5.8.

| Product Code | Diameter | Anchor Hole Size (mm) | Eye Hole Width (mm) | Shield Length (mm) | Thread Diameter (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|-----------------------|---------------------|--------------------|----------------------|---------------------|---------|-----------|
| 0865EYE6     | M6       | 12                    | 10                  | 45                 | 6                    | 50                  | 50      | 400       |
| 0865EYE8     | M8       | 14                    | 12                  | 50                 | 8                    | 55                  | 50      | 200       |
| 0865EYE10    | M10      | 16                    | 14                  | 60                 | 10                   | 65                  | 25      | 100       |
| 0865EYE12    | M12      | 18                    | 16                  | 75                 | 12                   | 85                  | 15      | 60        |

## HOOK BOLT SHIELD ANCHOR ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick • Stone

The shield anchor is the most popular anchor, internally threaded for fixing into masonry and concrete. Ideal general purpose anchor bolt, suitable for variations in hole size. Anchor body grade 5.8.

| Product Code | Diameter | Anchor Hole Size (mm) | Shield Length (mm) | Thread Diameter (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|-----------------------|--------------------|----------------------|---------------------|---------|-----------|
| 0865H6       | M6       | 12                    | 45                 | 6                    | 50                  | 50      | 400       |
| 0865H8       | M8       | 14                    | 50                 | 8                    | 55                  | 50      | 200       |
| 0865H10      | M10      | 16                    | 60                 | 10                   | 65                  | 25      | 100       |

## PROJECTING BOLT SHIELD ANCHOR ZINC & CLEAR CR3+



**The perfect anchor for use in:**  
Concrete • Concrete Blocks • Solid Brick • Stone

The shield anchor is the most popular anchor, internally threaded for fixing into masonry and concrete. Ideal general purpose anchor bolt, suitable for variations in hole size. Anchor body grade 5.8.

| Product Code | Diameter | Length (mm) | Anchor Hole Size (mm) | Shield Length (mm) | Thread Diameter (mm) | Fastens Up To (mm) | Bolt Length (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|-----------------------|--------------------|----------------------|--------------------|------------------|---------------------|---------|-----------|
| 0865P610     | M6       | 10          | 12                    | 45                 | 6                    | 10                 | 65               | 50                  | 50      | 500       |
| 0865P625     | M6       | 25          | 12                    | 45                 | 6                    | 25                 | 80               | 50                  | 50      | 400       |
| 0865P660     | M6       | 60          | 12                    | 45                 | 6                    | 60                 | 115              | 50                  | 50      | 300       |
| 0865P810     | M8       | 10          | 14                    | 50                 | 8                    | 10                 | 75               | 55                  | 50      | 200       |
| 0865P825     | M8       | 25          | 14                    | 50                 | 8                    | 25                 | 90               | 55                  | 50      | 200       |
| 0865P860     | M8       | 60          | 14                    | 50                 | 8                    | 60                 | 125              | 55                  | 50      | 200       |
| 0865P1015    | M10      | 15          | 16                    | 60                 | 10                   | 15                 | 90               | 65                  | 25      | 150       |
| 0865P1030    | M10      | 30          | 16                    | 60                 | 10                   | 30                 | 105              | 65                  | 25      | 125       |
| 0865P1060    | M10      | 60          | 16                    | 60                 | 10                   | 60                 | 135              | 65                  | 25      | 100       |
| 0865P1215    | M12      | 15          | 20                    | 75                 | 12                   | 15                 | 110              | 85                  | 20      | 80        |
| 0865P1230    | M12      | 30          | 20                    | 75                 | 12                   | 30                 | 125              | 85                  | 20      | 80        |
| 0865P1275    | M12      | 75          | 20                    | 75                 | 12                   | 75                 | 170              | 85                  | 15      | 75        |
| 0865P1615    | M16      | 15          | 25                    | 115                | 16                   | 15                 | 150              | 125                 | 10      | 40        |
| 0865P1635    | M16      | 35          | 25                    | 115                | 16                   | 35                 | 170              | 125                 | 5       | 30        |
| 0865P1675    | M16      | 75          | 25                    | 115                | 16                   | 75                 | 210              | 125                 | 5       | 30        |

## SHIELD ANCHOR SHIELD ONLY / ZINC & CLEAR CR3+



**The perfect anchor for use in:**  
Concrete • Concrete Blocks • Solid Brick • Stone

The shield anchor is the most popular anchor, internally threaded for fixing into masonry and concrete. Ideal general purpose anchor bolt, suitable for variations in hole size. Anchor body grade 5.8.

| Product Code | Diameter | Anchor Hole Size (mm) | Shield Length (mm) | Thread Diameter (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|-----------------------|--------------------|----------------------|---------------------|---------|-----------|
| 0865S6       | M6       | 12                    | 45                 | 6                    | 50                  | 50      | 500       |
| 0865S8       | M8       | 14                    | 50                 | 8                    | 55                  | 50      | 500       |
| 0865S10      | M10      | 16                    | 60                 | 10                   | 65                  | 50      | 400       |
| 0865S12      | M12      | 20                    | 75                 | 12                   | 85                  | 25      | 200       |
| 0865S16      | M16      | 25                    | 115                | 16                   | 125                 | 10      | 100       |

# SERBOLT®

## CONCRETE SCREWBOLTS

Serbolt concrete screwbolts have superb insertion speed into pre-drilled holes, with a self tapping thread that requires less torque to drive, saving time and battery life whilst offering high pull out values.

Serbolt is a non-expanding fixing, doesn't require a wall plug, and therefore makes it ideal for close-to-edge applications.

Serbolt concrete screwbolts are removable and, at the discretion of the installer, can be re-used in the same hole making them an ideal fixing for permanent or temporary anchoring.



Self  
Tapping  
thread



Close  
to edge  
fixing



Superb  
insertion  
speed



Time  
saving



Countersunk  
Torx Head

*Zinc & Clear CR3+*




Hexagon  
Head

*Zinc & Clear CR3+  
& Galvanised Finishes*



Hexagon  
Flange Head

*Zinc & Clear CR3+*

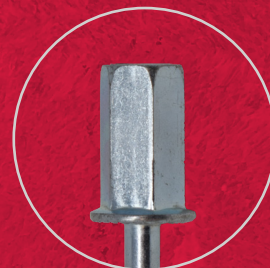

Rod  
Hanger

*Zinc & Clear CR3+*

**The perfect anchor for use in:**

Uncracked Concrete • Concrete Blocks • Solid Brick • Stone

## SERBOLT HEXAGON CONCRETE SCREWBOLT ZINC & CLEAR CR3+



The perfect anchor for use in:  
Uncracked Concrete • Concrete Blocks • Solid Brick • Stone

Serbolt concrete screwbolts have superb insertion speed into pre-drilled holes, with a self tapping thread that requires less torque to drive, saving time and battery life whilst offering high pull out values. Serbolt is a non-expanding fixing, doesn't require a wall plug, and therefore makes it ideal for close-to-edge applications. Serbolt concrete screwbolts are removable and, at the discretion of the installer, can be re-used in the same hole making them an ideal fixing for permanent or temporary anchoring.

| Product Code | Diameter | Length (mm) | Drill Hole Diameter (mm) | Inst. Torque (Nm) | Min Embedment Depth (mm) | Max Fixing Thickness (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Across Flats Sizes (for spanner) | Thread Length (mm) | Thread Diameter (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|--------------------------|-------------------|--------------------------|---------------------------|-------------------|-----------------|----------------------------------|--------------------|----------------------|---------|-----------|
| 0855M490050  | M6       | 50          | 6                        | 25                | 30                       | 20                        | 1.95              | 4.30            | 10mm/AF                          | Full               | 8                    | 100     | 800       |
| 0855M490100  | M6       | 100         | 6                        | 25                | 30                       | 70                        | 1.95              | 4.30            | 10mm/AF                          | Full               | 8                    | 100     | 600       |
| 0855M540060  | M8       | 60          | 8                        | 40                | 40                       | 20                        | 3.60              | 6.30            | 13mm/AF                          | Full               | 10                   | 100     | 800       |
| 0855M540075  | M8       | 75          | 8                        | 40                | 40                       | 35                        | 3.60              | 6.30            | 13mm/AF                          | Full               | 10                   | 100     | 600       |
| 0855M540100  | M8       | 100         | 8                        | 40                | 40                       | 60                        | 3.60              | 6.30            | 13mm/AF                          | Full               | 10                   | 100     | 400       |
| 0855M540130  | M8       | 130         | 8                        | 40                | 40                       | 90                        | 3.60              | 6.30            | 13mm/AF                          | 100                | 10                   | 50      | 400       |
| 0855M540150  | M8       | 150         | 8                        | 40                | 40                       | 110                       | 3.60              | 6.30            | 13mm/AF                          | 100                | 10                   | 50      | 300       |
| 0855M560060  | M10      | 60          | 10                       | 60                | 50                       | 10                        | 4.70              | 11.50           | 17mm/AF                          | Full               | 12                   | 50      | 400       |
| 0855M560075  | M10      | 75          | 10                       | 60                | 50                       | 25                        | 4.70              | 11.50           | 17mm/AF                          | Full               | 12                   | 50      | 400       |
| 0855M560100  | M10      | 100         | 10                       | 60                | 50                       | 50                        | 4.70              | 11.50           | 17mm/AF                          | Full               | 12                   | 50      | 300       |
| 0855M560130  | M10      | 130         | 10                       | 60                | 50                       | 80                        | 4.70              | 11.50           | 17mm/AF                          | 100                | 12                   | 50      | 200       |
| 0855M560150  | M10      | 150         | 10                       | 60                | 50                       | 100                       | 4.70              | 11.50           | 17mm/AF                          | 100                | 12                   | 50      | 200       |
| 0855M580075  | M12      | 75          | 12                       | 80                | 60                       | 15                        | 6.60              | 14.90           | 19mm/AF                          | Full               | 14                   | 50      | 300       |
| 0855M580100  | M12      | 100         | 12                       | 80                | 60                       | 40                        | 6.60              | 14.90           | 19mm/AF                          | Full               | 14                   | 25      | 200       |
| 0855M580130  | M12      | 130         | 12                       | 80                | 60                       | 70                        | 6.60              | 14.90           | 19mm/AF                          | 100                | 14                   | 25      | 200       |
| 0855M580150  | M12      | 150         | 12                       | 80                | 60                       | 90                        | 6.60              | 14.90           | 19mm/AF                          | 100                | 14                   | 25      | 150       |
| 0855M580200  | M12      | 200         | 12                       | 80                | 60                       | 140                       | 6.60              | 14.90           | 19mm/AF                          | 150                | 14                   | 10      | 60        |
| 0855M600100  | M14      | 100         | 14                       | 90                | 70                       | 30                        | 9.50              | 19.50           | 22mm/AF                          | Full               | 16                   | 25      | 150       |
| 0855M600130  | M14      | 130         | 14                       | 90                | 70                       | 60                        | 9.50              | 19.50           | 22mm/AF                          | 100                | 16                   | 20      | 120       |
| 0855M600150  | M14      | 150         | 14                       | 90                | 70                       | 80                        | 9.50              | 19.50           | 22mm/AF                          | 100                | 16                   | 10      | 60        |
| 0855M620100  | M16      | 100         | 16                       | 100               | 80                       | 20                        | 13.50             | 22.50           | 24mm/AF                          | Full               | 18                   | 10      | 80        |
| 0855M620150  | M16      | 150         | 16                       | 100               | 80                       | 70                        | 13.50             | 22.50           | 24mm/AF                          | 100                | 18                   | 10      | 60        |
| 0855M620200  | M16      | 200         | 16                       | 100               | 80                       | 120                       | 13.50             | 22.50           | 24mm/AF                          | 100                | 18                   | 10      | 60        |



## NOW AVAILABLE IN SMALL BOX QTY'S

| Product Code | Diameter | Length (mm) | Drill Hole Diameter (mm) | Inst. Torque (Nm) | Min Embedment Depth (mm) | Max Fixing Thickness (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Across Flats Sizes (for spanner) | Thread Length (mm) | Thread Diameter (mm) | NEW Small Box Qty | Outer Qty |
|--------------|----------|-------------|--------------------------|-------------------|--------------------------|---------------------------|-------------------|-----------------|----------------------------------|--------------------|----------------------|-------------------|-----------|
| MASSBH0650   | M6       | 50          | 6                        | 25                | 30                       | 20                        | 1.95              | 4.30            | 10mm/AF                          | Full               | 8                    | 10                | 640       |
| MASSBH06100  | M6       | 100         | 6                        | 25                | 30                       | 70                        | 1.95              | 4.30            | 10mm/AF                          | Full               | 8                    | 10                | 320       |
| MASSBH0860   | M8       | 60          | 8                        | 40                | 40                       | 20                        | 3.60              | 6.30            | 13mm/AF                          | Full               | 10                   | 10                | 640       |
| MASSBH0875   | M8       | 75          | 8                        | 40                | 40                       | 35                        | 3.60              | 6.30            | 13mm/AF                          | Full               | 10                   | 10                | 640       |
| MASSBH08100  | M8       | 100         | 8                        | 40                | 40                       | 60                        | 3.60              | 6.30            | 13mm/AF                          | Full               | 10                   | 10                | 320       |
| MASSBH08130  | M8       | 130         | 8                        | 40                | 40                       | 90                        | 3.60              | 6.30            | 13mm/AF                          | 100                | 10                   | 10                | 320       |
| MASSBH08150  | M8       | 150         | 8                        | 40                | 40                       | 110                       | 3.60              | 6.30            | 13mm/AF                          | 100                | 10                   | 10                | 200       |
| MASSBH1060   | M10      | 60          | 10                       | 60                | 50                       | 10                        | 4.70              | 11.50           | 17mm/AF                          | Full               | 12                   | 10                | 320       |
| MASSBH1075   | M10      | 75          | 10                       | 60                | 50                       | 25                        | 4.70              | 11.50           | 17mm/AF                          | Full               | 12                   | 10                | 320       |
| MASSBH10100  | M10      | 100         | 10                       | 60                | 50                       | 50                        | 4.70              | 11.50           | 17mm/AF                          | Full               | 12                   | 10                | 320       |
| MASSBH10130  | M10      | 130         | 10                       | 60                | 50                       | 80                        | 4.70              | 11.50           | 17mm/AF                          | 100                | 12                   | 10                | 320       |
| MASSBH10150  | M10      | 150         | 10                       | 60                | 50                       | 100                       | 4.70              | 11.50           | 17mm/AF                          | 100                | 12                   | 5                 | 200       |
| MASSBH1275   | M12      | 75          | 12                       | 80                | 60                       | 15                        | 6.60              | 14.90           | 19mm/AF                          | Full               | 14                   | 10                | 200       |
| MASSBH12100  | M12      | 100         | 12                       | 80                | 60                       | 40                        | 6.60              | 14.90           | 19mm/AF                          | Full               | 14                   | 5                 | 320       |
| MASSBH12130  | M12      | 130         | 12                       | 80                | 60                       | 70                        | 6.60              | 14.90           | 19mm/AF                          | 100                | 14                   | 5                 | 320       |
| MASSBH12150  | M12      | 150         | 12                       | 80                | 60                       | 90                        | 6.60              | 14.90           | 19mm/AF                          | 100                | 14                   | 5                 | 200       |
| MASSBH12200  | M12      | 200         | 12                       | 80                | 60                       | 140                       | 6.60              | 14.90           | 19mm/AF                          | 150                | 14                   | 5                 | 200       |

## SERBOLT HEXAGON CONCRETE SCREWBOLT MECHANICAL GALVANISED



**The perfect anchor for use in:**  
Uncracked Concrete • Concrete Blocks • Solid Brick • Stone

Serbolt concrete screwbolts have superb insertion speed into pre-drilled holes, with a self tapping thread that requires less torque to drive, saving time and battery life whilst offering high pull out values. Serbolt is a non-expanding fixing, doesn't require a wall plug, and therefore makes it ideal for close-to-edge applications. Serbolt concrete screwbolts are removable and, at the discretion of the installer, can be re-used in the same hole making them an ideal fixing for permanent or temporary anchoring.

| Product Code | Diameter | Length (mm) | Drill Hole Diameter (mm) | Inst. Torque (Nm) | Min Embedment Depth (mm) | Max Fixing Thickness (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Across Flats Sizes (for spanner) | Thread Length (mm) | Thread Diameter (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|--------------------------|-------------------|--------------------------|---------------------------|-------------------|-----------------|----------------------------------|--------------------|----------------------|---------|-----------|
| 0855M540060G | M8       | 60          | 8                        | 40                | 40                       | 20                        | 3.60              | 6.30            | 13mm/AF                          | Full               | 10                   | 100     | 800       |
| 0855M540100G | M8       | 100         | 8                        | 40                | 40                       | 60                        | 3.60              | 6.30            | 13mm/AF                          | Full               | 10                   | 100     | 600       |
| 0855M560100G | M10      | 100         | 10                       | 60                | 50                       | 50                        | 4.70              | 11.50           | 17mm/AF                          | Full               | 12                   | 50      | 300       |
| 0855M560150G | M10      | 150         | 10                       | 60                | 50                       | 100                       | 4.70              | 11.50           | 17mm/AF                          | 100                | 12                   | 50      | 200       |
| 0855M580100G | M12      | 100         | 12                       | 80                | 60                       | 40                        | 6.60              | 14.90           | 19mm/AF                          | Full               | 14                   | 25      | 200       |
| 0855M580150G | M12      | 150         | 12                       | 80                | 60                       | 90                        | 6.60              | 14.90           | 19mm/AF                          | 100                | 14                   | 25      | 150       |

## SERBOLT FLANGE HEXAGON CONCRETE SCREWBOLT ZINC & CLEAR CR3+



**The perfect anchor for use in:**  
Uncracked Concrete • Concrete Blocks • Solid Brick • Stone

Serbolt concrete screwbolts have superb insertion speed into pre-drilled holes, with a self tapping thread that requires less torque to drive, saving time and battery life whilst offering high pull out values. Serbolt is a non-expanding fixing, doesn't require a wall plug, and therefore makes it ideal for close-to-edge applications. Serbolt concrete screwbolts are removable and, at the discretion of the installer, can be re-used in the same hole making them an ideal fixing for permanent or temporary anchoring.

| Product Code | Diameter | Length (mm) | Drill Hole Diameter (mm) | Inst. Torque (Nm) | Min Embedment Depth (mm) | Max Fixing Thickness (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Across Flats Sizes (for spanner) | Thread Length (mm) | Thread Diameter (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|--------------------------|-------------------|--------------------------|---------------------------|-------------------|-----------------|----------------------------------|--------------------|----------------------|---------|-----------|
| 0856M490030  | M6       | 30          | 6                        | 25                | 25                       | 5                         | 1.95              | 4.30            | 10mm/AF                          | Full               | 8                    | 100     | 800       |
| 0856M490050  | M6       | 50          | 6                        | 25                | 30                       | 20                        | 1.95              | 4.30            | 10mm/AF                          | Full               | 8                    | 100     | 800       |
| 0856M490075  | M6       | 75          | 6                        | 25                | 30                       | 45                        | 1.95              | 4.30            | 10mm/AF                          | Full               | 8                    | 100     | 600       |
| 0856M490100  | M6       | 100         | 6                        | 25                | 30                       | 70                        | 1.95              | 4.30            | 10mm/AF                          | Full               | 8                    | 100     | 600       |

## SERBOLT COUNTERSUNK TORX CONCRETE SCREWBOLT ZINC & CLEAR CR3+



**The perfect anchor for use in:**  
Uncracked Concrete • Concrete Blocks • Solid Brick • Stone

Serbolt concrete screwbolts have superb insertion speed into pre-drilled holes, with a self tapping thread that requires less torque to drive, saving time and battery life whilst offering high pull out values. Serbolt is a non-expanding fixing, doesn't require a wall plug, and therefore makes it ideal for close-to-edge applications. Serbolt concrete screwbolts are removable and, at the discretion of the installer, can be re-used in the same hole making them an ideal fixing for permanent or temporary anchoring.

| Product Code | Diameter | Length (mm) | Drill Hole Diameter (mm) | Inst. Torque (Nm) | Min Embedment Depth (mm) | Max Fixing Thickness (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Across Flats Sizes (for spanner) | Thread Length (mm) | Thread Diameter (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|--------------------------|-------------------|--------------------------|---------------------------|-------------------|-----------------|----------------------------------|--------------------|----------------------|---------|-----------|
| 0857M490050  | M6       | 50          | 6                        | 25                | 30                       | 20                        | 1.95              | 4.30            | T30 Bit                          | Full               | 8                    | 100     | 800       |
| 0857M490075  | M6       | 75          | 6                        | 25                | 30                       | 45                        | 1.95              | 4.30            | T30 Bit                          | Full               | 8                    | 100     | 800       |
| 0857M490100  | M6       | 100         | 6                        | 25                | 30                       | 70                        | 1.95              | 4.30            | T30 Bit                          | Full               | 8                    | 100     | 800       |

## SERBOLT ROD HANGER CONCRETE SCREWBOLT ZINC & CLEAR CR3+



The perfect anchor for use in:  
Uncracked Concrete • Concrete Blocks • Solid Brick • Stone

Serbolt concrete screwbolts have superb insertion speed into pre-drilled holes, with a self tapping thread that requires less torque to drive, saving time and battery life whilst offering high pull out values. Serbolt is a non-expanding fixing, doesn't require a wall plug, and therefore makes it ideal for close-to-edge applications. Serbolt concrete screwbolts are removable and, at the discretion of the installer, can be re-used in the same hole making them an ideal fixing for permanent or temporary anchoring.

| Product Code | Diameter | Length (mm) | Drill Hole Diameter (mm) | Inst. Torque (Nm) | Max Fixing Thickness (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Across Flats Sizes (for spanner) | Thread Length (mm) | Thread Diameter (mm) | Internal Thread Length (mm) | Internal Thread Diameter (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|--------------------------|-------------------|---------------------------|-------------------|-----------------|----------------------------------|--------------------|----------------------|-----------------------------|-------------------------------|---------|-----------|
| 0858M490035  | M6       | 35          | 6                        | 25                | 5                         |                   |                 | 13mm/AF                          | Full               | 7.5                  | 9                           | 8/10                          | 50      | 400       |
| 0858M490055  | M6       | 55          | 6                        | 25                | 25                        |                   |                 | 13mm/AF                          | 40                 | 7.5                  | 9                           | 8/10                          | 50      | 400       |

## CONCRETE FRAME SCREW ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete • Concrete Blocks • Hollow Blocks  
• Hollow Brick • Stone

The fastest way when attaching door and window frames, electrical boxes and furring strips. Countersunk torx head enables easy driving. Self tapping thread with a zinc plated CR3 finish. Removable and easy to adjust saving time and hassle. Torx T30 bit included.

| Product Code | Diameter (mm) | Length (mm) | Drill Size (mm) | Max Fixing Thickness (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|-----------------|---------------------------|---------------------|---------|-----------|
| 0869T7542    | 7.5           | 42          | 6               | 5                         | 45                  | 100     | 1,200     |
| 0869T7550    | 7.5           | 52          | 6               | 10                        | 45                  | 100     | 1,200     |
| 0869T7560    | 7.5           | 62          | 6               | 20                        | 45                  | 100     | 1,000     |
| 0869T7572    | 7.5           | 72          | 6               | 30                        | 45                  | 100     | 1,000     |
| 0869T7580    | 7.5           | 82          | 6               | 40                        | 45                  | 100     | 800       |
| 0869T7592    | 7.5           | 92          | 6               | 55                        | 45                  | 100     | 800       |
| 0869T75100   | 7.5           | 102         | 6               | 60                        | 45                  | 100     | 800       |
| 0869T75112   | 7.5           | 112         | 6               | 70                        | 45                  | 100     | 800       |
| 0869T75120   | 7.5           | 122         | 6               | 80                        | 45                  | 100     | 600       |
| 0869T75132   | 7.5           | 132         | 6               | 90                        | 45                  | 100     | 600       |
| 0869T75150   | 7.5           | 152         | 6               | 110                       | 45                  | 100     | 600       |
| 0869T75180   | 7.5           | 182         | 6               | 130                       | 45                  | 100     | 600       |
| 0869T75202   | 7.5           | 202         | 6               | 150                       | 45                  | 100     | 600       |

## CONCRETE FRAME SCREW ZINC YELLOW PASSIVATED




The perfect anchor for use in:  
Concrete • Concrete Blocks • Hollow Blocks  
• Hollow Brick • Stone

The fastest way when attaching door and window frames, electrical boxes and furring strips. Countersunk torx head enables easy driving. Self tapping thread with a zinc yellow passivated finish. Removable and easy to adjust saving time and hassle. Torx T30 bit included.

| Product Code | Diameter (mm) | Length (mm) | Drill Size (mm) | Max Fixing Thickness (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|-----------------|---------------------------|---------------------|---------|-----------|
| MAMCFS42     | 7.5           | 42          | 6               | 5                         | 45                  | 100     | 1,000     |
| MAMCFS52     | 7.5           | 52          | 6               | 10                        | 45                  | 100     | 1,000     |
| MAMCFS62     | 7.5           | 62          | 6               | 20                        | 45                  | 100     | 600       |
| MAMCFS72     | 7.5           | 72          | 6               | 30                        | 45                  | 100     | 600       |
| MAMCFS82     | 7.5           | 82          | 6               | 40                        | 45                  | 100     | 600       |
| MAMCFS92     | 7.5           | 92          | 6               | 55                        | 45                  | 100     | 800       |
| MAMCFS102    | 7.5           | 102         | 6               | 60                        | 45                  | 100     | 600       |
| MAMCFS112    | 7.5           | 112         | 6               | 70                        | 45                  | 100     | 600       |
| MAMCFS122    | 7.5           | 122         | 6               | 80                        | 45                  | 100     | 600       |
| MAMCFS132    | 7.5           | 132         | 6               | 90                        | 45                  | 100     | 600       |
| MAMCFS152    | 7.5           | 152         | 6               | 110                       | 45                  | 100     | 600       |
| MAMCFS182    | 7.5           | 182         | 6               | 130                       | 45                  | 100     | 400       |
| MAMCFS202    | 7.5           | 202         | 6               | 150                       | 45                  | 100     | 400       |

## DROP IN WEDGE ANCHOR PLAIN / ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete

The drop in is a deformation controlled wedge anchor suitable for concrete over 20N/mm<sup>2</sup>. It has an internal threaded socket for use with bolts or threaded rod of any length.

| Product Code | Diameter | Anchor Length (mm) | Anchor Hole Size (mm) | Min Hole Depth (mm) | Int. Thread Length (mm) | Box Qty | Outer Qty |
|--------------|----------|--------------------|-----------------------|---------------------|-------------------------|---------|-----------|
| 0843M49      | M6       | 25                 | 8                     | 25                  | 10                      | 100     | 1,000     |
| 0843M54      | M8       | 30                 | 10                    | 30                  | 14                      | 100     | 1,000     |
| 0843M56      | M10      | 40                 | 12                    | 40                  | 15                      | 100     | 600       |
| 0843M62      | M16      | 65                 | 20                    | 65                  | 22                      | 25      | 100       |
| 0843M64      | M20      | 80                 | 25                    | 80                  | 30                      | 10      | 60        |

## DROP IN WEDGE ANCHOR PLAIN / STAINLESS STEEL




The perfect anchor for use in:  
Concrete

The drop in is a deformation controlled wedge anchor suitable for concrete over 20N/mm<sup>2</sup>. It has an internal threaded socket for use with bolts or threaded rod of any length.

| Product Code | Diameter | Anchor Length (mm) | Anchor Hole Size (mm) | Min Hole Depth (mm) | Int. Thread Length (mm) | Box Qty | Outer Qty |
|--------------|----------|--------------------|-----------------------|---------------------|-------------------------|---------|-----------|
| 0843M49SS    | M6       | 25                 | 8                     | 25                  | 10                      | 100     | 1,000     |
| 0843M54SS    | M8       | 30                 | 10                    | 30                  | 14                      | 100     | 1,000     |
| 0843M56SS    | M10      | 40                 | 12                    | 40                  | 15                      | 100     | 1,000     |
| 0843M58SS    | M12      | 50                 | 16                    | 50                  | 20                      | 50      | 200       |
| 0843M62SS    | M16      | 65                 | 20                    | 65                  | 22                      | 25      | 100       |

## DWS // DROP IN WEDGE ANCHOR ETA APPROVED / PLAIN / ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete

The drop in is a deformation controlled wedge anchor suitable for concrete over 20N/mm<sup>2</sup>. It has an internal threaded socket for use with bolts or threaded rod of any length.

| Product Code | Diameter | Anchor Length (mm) | Anchor Hole Size (mm) | Min Hole Depth (mm) | Int. Thread Length (mm) | Box Qty | Outer Qty |
|--------------|----------|--------------------|-----------------------|---------------------|-------------------------|---------|-----------|
| 0843ETA49    | M6       | 25                 | 8                     | 25                  | 10                      | 100     | 2,000     |
| 0843ETA54    | M8       | 30                 | 10                    | 33                  | 14                      | 100     | 2,000     |
| 0843ETA56    | M10      | 40                 | 12                    | 43                  | 15                      | 100     | 1,000     |
| 0843ETA58    | M12      | 50                 | 16                    | 54                  | 20                      | 50      | 500       |
| 0843ETA62    | M16      | 65                 | 20                    | 70                  | 22                      | 25      | 100       |
| 0843ETA64    | M20      | 80                 | 25                    | 85                  | 30                      | 25      | 60        |

## DWS-L // DROP IN WEDGE ANCHOR ETA APPROVED / LIPPED / ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete

The drop in is a deformation controlled wedge anchor suitable for concrete over 20N/mm². It has an internal threaded socket for use with bolts or threaded rod of any length. Lipped rim anchors are used to keep the anchor flush with the surface. Ideal when the hole depth is much deeper as this won't effect the anchor.

| Product Code | Diameter | Anchor Length (mm) | Anchor Hole Size (mm) | Min Hole Depth (mm) | Int. Thread Length (mm) | Box Qty | Outer Qty |
|--------------|----------|--------------------|-----------------------|---------------------|-------------------------|---------|-----------|
| 0843ETA54L   | M8       | 30                 | 10                    | 33                  | 14                      | 100     | 2,000     |
| 0843ETA56L   | M10      | 40                 | 12                    | 43                  | 15                      | 50      | 1,000     |
| 0843ETA58L   | M12      | 50                 | 16                    | 54                  | 20                      | 50      | 500       |

## DROP IN WEDGE ANCHOR SETTING TOOL ZINC & CLEAR CR3+



| Product Code | Diameter | Sleeve Thread Diameter (mm) | Box Qty | Outer Qty |
|--------------|----------|-----------------------------|---------|-----------|
| 0843ETA49SET | M6       | 6                           | 1       | 200       |
| 0843ETA54SET | M8       | 8                           | 1       | 200       |
| 0843ETA56SET | M10      | 10                          | 1       | 100       |
| 0843ETA58SET | M12      | 12                          | 1       | 80        |
| 0843ETA62SET | M16      | 16                          | 1       | 35        |
| 0843ETA64SET | M20      | 20                          | 1       | 30        |

## RUBBER NUT WITH BRASS INSERT



The perfect anchor for use in:  
Hollow Blocks • Hollow Brick

Vibration resistant fixing that can be used in virtually any construction material as the sleeve compresses in irregular holes. Used in damp and sanitary applications.

| Product Code | Diameter | Length (mm) | Thread Diameter (mm) | Hole Diameter (mm) | Wall Thickness (mm) | Overall Length (mm) | Flange Thickness (mm) | Flange Diameter (mm) | Rec. Tightening Torque(Nm) | Box Qty | Outer Qty |
|--------------|----------|-------------|----------------------|--------------------|---------------------|---------------------|-----------------------|----------------------|----------------------------|---------|-----------|
| 0864M450011  | M4       | 11          | 4                    | 8                  | 0-2                 | 11                  | 1.3                   | 11                   | 0.4                        | 50      | 12,000    |
| 0864M450025  | M4       | 25          | 4                    | 8                  | 6-14                | 25                  | 1.3                   | 14                   | 0.4                        | 50      | 15,000    |
| 0864M470015  | M5       | 15          | 5                    | 10                 | 0-5                 | 15                  | 1.0                   | 13                   | 0.8                        | 50      | 7,500     |
| 0864M470025  | M5       | 25          | 5                    | 10                 | 8-16                | 25                  | 1.3                   | 14                   | 0.8                        | 50      | 3,600     |
| 0864M490015  | M6       | 15          | 6                    | 13                 | 0-3                 | 15                  | 1.3                   | 16                   | 0.8                        | 50      | 4,500     |
| 0864M490025  | M6       | 25          | 6                    | 13                 | 6-12                | 25                  | 2.0                   | 18                   | 0.9                        | 50      | 2,400     |
| 0864M540025  | M8       | 25          | 8                    | 18                 | 4-10                | 25                  | 1.8                   | 22                   | 1.4                        | 50      | 1,350     |
| 0864M540050  | M8       | 50          | 8                    | 18                 | 15-39               | 50                  | 1.6                   | 20                   | 3.6                        | 50      | 600       |
| 0864M560055  | M10      | 55          | 10                   | 20                 | 20-36               | 55                  | 1.3                   | 22.5                 | 5.0                        | 50      | 500       |
| 0864M580075  | M12      | 75          | 12                   | 24                 | 20-36               | 75                  | 1.3                   | 27                   | 6.6                        | 50      | 400       |

## PR // POLYESTER RESIN ETA APPROVED - OPTION 7 / STYRENE FREE



**The perfect anchor for use in:**  
Solid Brick • Hollow Brick • Lightweight  
Concrete Block • Concrete Block

A two component chemical anchoring injection system. A formulation derived from polyester styrene free resin with high bond strength, developed principally to anchor threaded rods. Covered by ETA approval for concrete, and masonry/hollow wall installations.

| Product Code | Size (ml) | Box Qty |
|--------------|-----------|---------|
| 0868MC165    | 165       | 15      |
| 0868PR300    | 300       | 12      |
| 0868EA410    | 410       | 12      |

## VR // VINYLESTER RESIN ETA APPROVED - OPTION 1 / STYRENE FREE



**The perfect anchor for use in:**  
Solid Brick • Hollow Brick • Lightweight  
Concrete Block • Concrete Block

A two component chemical anchoring injection system. A formulation derived from vinylester SF resin with very high bond strength, developed principally to anchor threaded rods and rebar into concrete. Used for high performance structural applications.

| Product Code | Size (ml) | Box Qty |
|--------------|-----------|---------|
| 0868VR300    | 300       | 12      |

## MASONMATE EXTRA ETA APPROVED FIXINGS

Fixings with a European Technical Approval (ETA) have undergone a rigorous evaluation and testing process by an independent, accredited testing body. These products meet the highest standards of quality and safety, and are increasingly becoming more specified in the construction industry.

ETA approved fixings meet specific performance requirements and offer extra peace of mind to the installer.



Masonmate products marked with this symbol carry an ETA



**MASONMATE EXTRA**  
UKTA APPROVAL NOW AVAILABLE  
ON OUR APPROVED THROUGH BOLTS

## HOLE CLEANING BRUSH



To clean the inner hole surface before resin injection. Various diameters allow to choose the most suitable for each hole and the wood handle assures a comfortable use. 300mm overall length.

| Product Code | Diameter (mm) | Length (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|---------|-----------|
| 0868B59      | 13            | 300         | 1       | 40        |
| 0868B63      | 18            | 300         | 1       | 50        |
| 0868B67      | 28            | 300         | 1       | 40        |

## BLOW OUT PUMP



Especially designed for hole cleaning during installation process. With a good balance between lightness and robustness. Hand operated, for use in holes up to 190mm.

| Product Code | Box Qty | Outer Qty |
|--------------|---------|-----------|
| 0868BP       | 1       | 24        |

## SPARE MIXER NOZZLE AND EXTENSION



The special design of interior elements mixes the two components more generously. The nozzle extension lengthens the nozzle for special applications in very deep holes.

| Product Code | Description                               | Length (mm) | Bag Qty | Outer Qty |
|--------------|-------------------------------------------|-------------|---------|-----------|
| 0868MN       | Spare Nozzles - Suits 165/300/380/410ml   | -           | 10      | 100       |
| 0868MNE      | Mixer Extension - Suits 165/300/380/410ml | 250         | 10      | 150       |

## NYLON PERFORATED SLEEVE



Once the resin has been injected, the cap holds the fixing centred.

| Product Code | Diameter (mm) | Length (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|---------|-----------|
| 0868S64      | 20            | 85          | 10      | 120       |

## INJECTION TOOL



Our manual extrusion tools are made to a high quality and offer a number of significant benefits in design. Each tool has a smooth and comfortable trigger ratio designed to deliver a smooth but powerful force in all conditions.

Each tool features:

- Spring tension adjustment to allow tightening of the spring trigger action.
- Protection plate for vibration reduction in the vulnerable area.
- High tensile steel and protective finish.

| Product Code | Description              | Box Qty | Outer Qty |
|--------------|--------------------------|---------|-----------|
| 0868IT380    | Fits 380/410ml Cartridge | 1       | 10        |

## SCS // SPIN IN CAPSULE ETA APPROVED - OPTION 7 / VINYLESTER



The perfect anchor for use in:  
Concrete • Brick • Stone

High performance chemical based anchors made from Vinylester (often referred to as Epoxy Acrylate).  
For attaching studs to concrete, brick and stone. Free from expansion forces. ETA approved Option 7 anchor.

| Product Code | Diameter | Capsule Length (mm) | Hole Diameter (mm) | Capsule Diameter (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|---------------------|--------------------|-----------------------|---------------------|---------|-----------|
| 0868ETA54SI  | M8       | 80                  | 10                 | 9                     | 80                  | 10      | 500       |
| 0868ETA56SI  | M10      | 80                  | 12                 | 11                    | 90                  | 10      | 500       |
| 0868ETA58SI  | M12      | 95                  | 14                 | 13                    | 110                 | 10      | 500       |
| 0868ETA62SI  | M16      | 95                  | 18                 | 17                    | 125                 | 10      | 200       |
| 0868ETA64SI  | M20      | 160                 | 25                 | 22                    | 170                 | 10      | 100       |
| 0868ETA66SI  | M24      | 170                 | 28                 | 24                    | 210                 | 10      | 100       |

## HAMMER IN CAPSULE VINYLESTER



The perfect anchor for use in:  
Concrete • Brick • Stone

High performance chemical based anchors made from Vinylester (often referred to as Epoxy Acrylate).  
For use with rebar or threaded rod/allthread in concrete.

| Product Code | Diameter | Capsule Length (mm) | Hole Diameter (mm) | Capsule Diameter (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|---------------------|--------------------|-----------------------|---------------------|---------|-----------|
| 0868M54HI    | M8       | 80                  | 10                 | 9                     | 80                  | 10      | 1,500     |
| 0868M56HI    | M10      | 90                  | 12                 | 11                    | 100                 | 10      | 1,080     |
| 0868M58HI    | M12      | 110                 | 14                 | 13                    | 120                 | 10      | 600       |
| 0868M62HI    | M16      | 125                 | 18                 | 17                    | 160                 | 10      | 380       |
| 0868M64HI    | M20      | 175                 | 23                 | 22                    | 200                 | 6       | 150       |
| 0868M66HI    | M24      | 210                 | 25                 | 24                    | 240                 | 6       | 108       |

## INTERNAL THREADED SOCKET ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete • Brick • Stone

Permanent threaded sockets for use with glass injection resins.  
It has an internal socket for use with bolts or threaded rod/allthread of any length.

| Product Code | Diameter | Length (mm) | Internal Thread Length (mm) | Outside Diameter | Hole Diameter (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|-----------------------------|------------------|--------------------|---------------------|---------|-----------|
| 0868I54      | M8       | 90          | 20                          | M12              | 14                 | 90                  | 25      | 300       |
| 0868I56      | M10      | 90          | 25                          | M16              | 18                 | 90                  | 25      | 225       |
| 0868I58      | M12      | 90          | 30                          | M20              | 25                 | 90                  | 25      | 100       |
| 0868I62      | M16      | 125         | 40                          | M20              | 28                 | 125                 | 10      | 60        |

## INTERNAL THREADED SOCKET A2 STAINLESS STEEL




The perfect anchor for use in:  
Concrete • Brick • Stone

Permanent threaded sockets for use with glass injection resins.  
It has an internal socket for use with bolts or threaded rod/allthread of any length.

| Product Code | Diameter | Length (mm) | Internal Thread Length (mm) | Outside Diameter | Hole Diameter (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|-----------------------------|------------------|--------------------|---------------------|---------|-----------|
| 0868I54SS    | M8       | 90          | 20                          | M12              | 14                 | 90                  | 25      | 375       |
| 0868I56SS    | M10      | 90          | 25                          | M16              | 18                 | 90                  | 25      | 225       |
| 0868I58SS    | M12      | 90          | 30                          | M20              | 25                 | 90                  | 25      | 100       |
| 0868I62SS    | M16      | 125         | 40                          | M20              | 28                 | 125                 | 10      | 60        |

## STUD ZINC & CLEAR CR3+



The perfect anchor for use in:  
Concrete • Brick • Stone

Industry standard length studs, complete with a nut and washer. Stud end cut to 45°, complete with a hexagon drive.  
Stud grade is 4.8, hex nut grade 8.

| Product Code | Diameter | Length (mm) | Hole Diameter (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|--------------------|--------------------|---------------------|---------|-----------|
| 0868S540110  | M8       | 110         | 10                 | 20                 | 80                  | 10      | 200       |
| 0868S560130  | M10      | 130         | 12                 | 45                 | 90                  | 10      | 100       |
| 0868S580160  | M12      | 160         | 14                 | 35                 | 110                 | 10      | 100       |
| 0868S620190  | M16      | 190         | 18                 | 45                 | 125                 | 10      | 50        |
| 0868S640260  | M20      | 260         | 25                 | 67                 | 170                 | 5       | 25        |
| 0868S660300  | M24      | 300         | 28                 | 65                 | 210                 | 5       | 15        |

## STUD DRY GALVANISED



The perfect anchor for use in:  
Concrete • Brick • Stone

Industry standard length studs, complete with a nut and washer. Stud end cut to 45°, complete with a hexagon drive.  
Stud grade is 4.8, hex nut grade 8.

| Product Code | Diameter | Length (mm) | Hole Diameter (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|--------------------|--------------------|---------------------|---------|-----------|
| 0868S560130G | M10      | 130         | 12                 | 45                 | 90                  | 10      | 100       |
| 0868S580160G | M12      | 160         | 14                 | 35                 | 110                 | 10      | 100       |
| 0868S620190G | M16      | 190         | 18                 | 45                 | 125                 | 10      | 50        |
| 0868S640260G | M20      | 260         | 25                 | 67                 | 170                 | 5       | 25        |
| 0868S660300G | M24      | 300         | 28                 | 65                 | 210                 | 5       | 15        |

## STUD A2 STAINLESS STEEL



The perfect anchor for use in:  
Concrete • Brick • Stone

Industry standard length studs, complete with a nut and washer. Stud end cut to 45°, complete with a hexagon drive.  
Stud grade is 4.8, hex nut grade 8.

| Product Code  | Diameter | Length (mm) | Hole Diameter (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|---------------|----------|-------------|--------------------|--------------------|---------------------|---------|-----------|
| 0868S540110SS | M8       | 110         | 10                 | 20                 | 80                  | 10      | 200       |
| 0868S560130SS | M10      | 130         | 12                 | 45                 | 90                  | 10      | 200       |
| 0868S580160SS | M12      | 160         | 14                 | 35                 | 110                 | 10      | 160       |
| 0868S620190SS | M16      | 190         | 18                 | 45                 | 125                 | 10      | 60        |
| 0868S640260SS | M20      | 260         | 25                 | 67                 | 170                 | 10      | 40        |

## FRAME FIXING NYLON PLUG / ZINC & CLEAR CR3+ SCREW



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick • Stone

These are expanding friction anchors designed for light and medium-weight concrete blocks and hollow bricks, as well as concrete. Quick and easy to install, they are suitable for heavy-duty fixing of uPVC, wood, and metal frames to wood or masonry.

| Product Code | Diameter (mm) | Length (mm) | Anchor Hole Size (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Box Qty | Outer Qty |
|--------------|---------------|-------------|-----------------------|--------------------|---------------------|-------------------|-----------------|---------|-----------|
| 0835M540060  | 8             | 60          | 8                     | 20                 | 70                  | 0.5               | 0.5             | 100     | 1,000     |
| 0835M540080  | 8             | 80          | 8                     | 40                 | 90                  | 0.5               | 0.5             | 100     | 1,000     |
| 0835M540100  | 8             | 100         | 8                     | 50                 | 110                 | 0.5               | 0.5             | 100     | 500       |
| 0835M540120  | 8             | 120         | 8                     | 70                 | 130                 | 0.5               | 0.5             | 50      | 500       |
| 0835M540135  | 8             | 140         | 8                     | 90                 | 150                 | 0.5               | 0.5             | 50      | 250       |
| 0835M560080  | 10            | 80          | 10                    | 40                 | 90                  | 0.6               | 0.5             | 50      | 500       |
| 0835M560100  | 10            | 100         | 10                    | 50                 | 110                 | 0.6               | 0.5             | 50      | 250       |
| 0835M560115  | 10            | 120         | 10                    | 70                 | 130                 | 0.6               | 0.5             | 50      | 250       |
| 0835M560135  | 10            | 140         | 10                    | 90                 | 150                 | 0.6               | 0.5             | 50      | 250       |
| 0835M560160  | 10            | 160         | 10                    | 110                | 170                 | 0.6               | 0.5             | 25      | 150       |

## HAMMER IN FIXING NYLON PLUG / ZINC & CLEAR CR3+ SCREW



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick • Stone

Perfect for securing timber or plastic to masonry, concrete or concrete blocks. Push the plug into the pre-drilled hole, and hammer the screw in. The screw is there to aid removal. Ideal where a quick fix is required into timberwork like battens, frames, wall linings, and thermal boards.

| Product Code | Diameter (mm) | Length (mm) | Anchor Hole Size (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Rec. Tensile (kN) | Rec. Shear (kN) | Box Qty | Outer Qty |
|--------------|---------------|-------------|-----------------------|--------------------|---------------------|-------------------|-----------------|---------|-----------|
| 0837M470030  | 5             | 30          | 5                     | 5                  | 40                  | 0.16              | 0.18            | 200     | 2,000     |
| 0837M470045  | 5             | 45          | 5                     | 15                 | 55                  | 0.18              | 0.20            | 200     | 2,000     |
| 0837M490040  | 6             | 40          | 6                     | 10                 | 50                  | 0.20              | 0.20            | 150     | 1,500     |
| 0837M490055  | 6             | 60          | 6                     | 25                 | 70                  | 0.22              | 0.22            | 100     | 1,000     |
| 0837M490070  | 6             | 70          | 6                     | 40                 | 80                  | 0.22              | 0.22            | 100     | 1,000     |
| 0837M540060  | 8             | 60          | 8                     | 12                 | 70                  | 0.32              | 0.30            | 100     | 1,000     |
| 0837M540075  | 8             | 80          | 8                     | 30                 | 90                  | 0.32              | 0.30            | 100     | 1,000     |
| 0837M540100  | 8             | 100         | 8                     | 60                 | 110                 | 0.32              | 0.30            | 100     | 500       |
| 0837M540120  | 8             | 120         | 8                     | 80                 | 130                 | 0.32              | 0.30            | 50      | 500       |
| 0837M540135  | 8             | 135         | 8                     | 95                 | 145                 | 0.32              | 0.30            | 50      | 250       |

## METAL WINDOW FRAME ANCHOR C/W COVER CAP



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick

Perfect for fixing door frames and window frames to most building materials. All steel for strength and durability.

| Product Code | Diameter (mm) | Length (mm) | Anchor Hole Size (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|-----------------------|--------------------|---------------------|---------|-----------|
| 0838T560092  | 10            | 92          | 10                    | 60                 | 50                  | 50      | 400       |
| 0838T560112  | 10            | 112         | 10                    | 80                 | 50                  | 50      | 300       |

## NYLON WINDOW FRAME ANCHOR C/W COVER CAP



The perfect anchor for use in:  
Concrete • Concrete Blocks • Solid Brick

For mounting uPVC window frames to brickwork and masonry. Anchors have white cover caps included.

| Product Code | Diameter (mm) | Length (mm) | Anchor Hole Size (mm) | Fastens Up To (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|-----------------------|--------------------|---------------------|---------|-----------|
| 0836M540140  | 8             | 140         | 8                     | 90                 | 60                  | 50      | 250       |

## HOLLOW WALL ANCHOR & SCREW ZINC & CLEAR CR3+



The perfect anchor for use in:  
Hollow Blocks • Plasterboard

Hollow wall anchors provide a secure hold in materials such as plasterboard, chipboard, plywood and fibreboard. Ideal for lightweight fixtures.

| Product Code | Diameter | Length (mm) | Screw Diameter (mm) | Anchor Length (mm) | Wall Thickness (mm) | Fastens Up To (mm) | Hole Diameter (mm) | Box Qty | Outer Qty |
|--------------|----------|-------------|---------------------|--------------------|---------------------|--------------------|--------------------|---------|-----------|
| 0840T450020  | M4       | 20          | 4                   | 20                 | 0-5                 | 8                  | 8                  | 100     | 1,000     |
| 0840T450032  | M4       | 32          | 4                   | 32                 | 3-12                | 16                 | 8                  | 100     | 1,000     |
| 0840T450040  | M4       | 38          | 4                   | 38                 | 10-16               | 17                 | 8                  | 100     | 1,000     |
| 0840T450050  | M4       | 46          | 4                   | 46                 | 16-24               | 30                 | 8                  | 100     | 1,000     |
| 0840T470040  | M5       | 37          | 5                   | 37                 | 6-13                | 17                 | 10                 | 100     | 1,000     |
| 0840T470065  | M5       | 65          | 5                   | 65                 | 14-32               | 26                 | 10                 | 100     | 600       |
| 0840T490052  | M6       | 52          | 6                   | 52                 | 3-16                | 30                 | 10                 | 50      | 500       |
| 0840T490065  | M6       | 65          | 6                   | 65                 | 14-32               | 26                 | 10                 | 50      | 500       |

## HOLLOW WALL ANCHOR SETTING TOOL



Unique setting tool for fast repetitive fixings.  
For use with hollow wall anchors.

| Product Code | Box Qty | Outer Qty |
|--------------|---------|-----------|
| 0840TSET     | 1       | 14        |

## SPRING TOGGLE WITH SCREW / ZINC & CLEAR CR3+



Light duty fixing, ideal for ceiling installations and gives high loadings because of its wide wing coverage.

The perfect anchor for use in:  
Hollow Blocks • Plasterboard

| Product Code | Diameter | Length (mm) | Screw Size (mm) | Wall Thickness (mm) | Cavity Depth (mm) | Hole Size (mm) | Rec. Tensile Load (kN) | Box Qty | Outer Qty |
|--------------|----------|-------------|-----------------|---------------------|-------------------|----------------|------------------------|---------|-----------|
| 0862M470050  | M5       | 50          | 50              | 20                  | 30                | 14             | 0.18                   | 100     | 600       |
| 0862M470075  | M5       | 75          | 75              | 45                  | 30                | 14             | 0.18                   | 50      | 500       |
| 0862M470100  | M5       | 100         | 100             | 70                  | 30                | 14             | 0.18                   | 50      | 500       |
| 0862M490075  | M6       | 75          | 75              | 45                  | 30                | 18             | 0.30                   | 50      | 300       |

## SPRING TOGGLE WINGS ONLY / ZINC & CLEAR CR3+



The perfect anchor for use in:  
Hollow Blocks • Plasterboard

| Product Code | Diameter | Length (mm) | Screw Size (mm) | Wall Thickness (mm) | Cavity Depth (mm) | Hole Size (mm) | Rec. Tensile Load (kN) | Box Qty | Outer Qty |
|--------------|----------|-------------|-----------------|---------------------|-------------------|----------------|------------------------|---------|-----------|
| 0862M39      | M3       | -           | -               | -                   | 20                | 11             | 0.10                   | 100     | 1,000     |
| 0862M47      | M5       | -           | -               | -                   | 30                | 14             | 0.18                   | 100     | 1,000     |
| 0862M49      | M6       | -           | -               | -                   | 30                | 18             | 0.30                   | 50      | 500       |

## PLASTIC WALL PLUG NYLON



The perfect anchor for use in:  
Solid Stone

All purpose cost effective fixings for light and medium applications. Manufactured to British standard lengths for the professional tradesman. Soft and pliable for cold site use (made with premium ADPE).

| Product Code | Diameter (mm) | Length (mm) | Anchor Hole Size (mm) | Plug Length (mm) | Screw Gauge | Screw Size (mm) | Min Hole Depth (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|-----------------------|------------------|-------------|-----------------|---------------------|---------|-----------|
| 0948TYELLOW  | -             | -           | 5                     | 25               | 4-6G        | 3.0-3.5         | 30                  | 100     | 10,000    |
| 0948TRED     | -             | -           | 5.5                   | 30               | 6-10G       | 3.5-5.0         | 37                  | 100     | 10,000    |
| 0948TBROWN   | -             | -           | 7                     | 37               | 10-14G      | 5.0-6.0         | 46                  | 100     | 10,000    |
| 0948TBLUE    | -             | -           | 10                    | 5                | 14-18G      | 6.0-8.0         | 55                  | 100     | 6,000     |

## NYLON WALL PLUG TYPE E / NYLON



The perfect anchor for use in:  
Concrete • Concrete Blocks • Hollow Blocks • Solid Brick  
• Hollow Brick • Aerated Concrete • Stone

Rimless plugs, ideal for fixing wall lights, shelving and cupboards. Often used with coachscrews as satellite dish fixings.

| Product Code | Diameter (mm) | Length (mm) | Anchor Hole Size (mm) | Plug Length (mm) | Screw Gauge | Screw Size (mm) | Min Hole Depth (mm) | Rec. Tensile Load (kN) | Box Qty | Outer Qty |
|--------------|---------------|-------------|-----------------------|------------------|-------------|-----------------|---------------------|------------------------|---------|-----------|
| 0947E525     | 5             | 25          | 5                     | 25               | 4-6G        | 2.5-3.5         | 35                  | 0.20                   | 500     | 5,000     |
| 0947E630     | 6             | 30          | 6                     | 30               | 6-10G       | 2.5-5.0         | 40                  | 0.30                   | 300     | 3,000     |
| 0947E735     | 7             | 35          | 7                     | 35               | 8-12G       | 4.5-5.0         | 40                  | 0.35                   | 200     | 2,000     |
| 0947E840     | 8             | 40          | 8                     | 40               | 10-14G      | 5.0-6.0         | 55                  | 0.45                   | 150     | 1,500     |
| 0947E1050    | 10            | 50          | 10                    | 50               | 14-18G      | 6.0-8.0         | 65                  | 0.90                   | 150     | 1,500     |
| 0947E1260    | 12            | 60          | 12                    | 60               | 18-24G      | 8.0-10.0        | 75                  | 1.10                   | 100     | 1,000     |
| 0947E1475    | 14            | 75          | 14                    | 75               | 24-32G      | 10.0-12.0       | 90                  | 1.90                   | 50      | 500       |

## UNIVERSAL NYLON WALL PLUG TYPE TPF / NYLON



The perfect anchor for use in:  
Concrete • Concrete Blocks • Hollow Blocks • Solid Brick  
• Hollow Brick • Aerated Concrete • Stone

Universal plugs used in lightweight, aerated and hollow blockwork giving quicker and greater expansion than standard wall plugs.

| Product Code | Diameter (mm) | Length (mm) | Anchor Hole Size (mm) | Plug Length (mm) | Screw Gauge | Screw Size (mm) | Min Hole Depth (mm) | Rec. Tensile Load (kN) | Box Qty | Outer Qty |
|--------------|---------------|-------------|-----------------------|------------------|-------------|-----------------|---------------------|------------------------|---------|-----------|
| 0947TPF637   | 6             | 37          | 6                     | 37               | 6-8G        | 3.5-4.0         | 50                  | 0.14                   | 200     | 2,000     |
| 0947TPF850   | 8             | 50          | 8                     | 50               | 10-12G      | 4.5-5.5         | 60                  | 0.20                   | 100     | 1,000     |
| 0947TPF1060  | 10            | 60          | 10                    | 60               | 12-14G      | 6.0-8.0         | 70                  | 0.30                   | 100     | 1,000     |

## CABLE TIES POLYAMIDE 6.6 / BLACK OR NEUTRAL



High tensile strength with low insertion force. Excellent resistance to weathering and ageing. Suitable for a multitude of uses in various industries. Self-locking for fast and easy application.

| Product Code | Diameter (mm) | Length (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|---------|-----------|
| 0946B2598    | 2.5           | 100         | 100     | 50,000    |
| 0946B26160   | 2.6           | 160         | 100     | 40,000    |
| 0946B26200   | 2.5           | 200         | 100     | 27,500    |
| 0946B36140   | 3.6           | 140         | 100     | 30,000    |
| 0946B36200   | 3.6           | 200         | 100     | 25,000    |
| 0946B36300   | 3.6           | 300         | 100     | 14,000    |
| 0946B36370   | 3.6           | 370         | 100     | 10,000    |
| 0946B46400   | 4.6           | 390         | 100     | 7,000     |
| 0946B48160   | 4.8           | 160         | 100     | 17,000    |
| 0946B48200   | 4.6           | 203         | 100     | 20,000    |
| 0946B48250   | 4.8           | 250         | 100     | 12,000    |
| 0946B48300   | 4.8           | 300         | 100     | 12,000    |
| 0946B48370   | 4.8           | 370         | 100     | 10,000    |
| 0946B48430   | 4.8           | 430         | 100     | 7,500     |
| 0946B76300   | 7.6           | 300         | 100     | 5,000     |
| 0946B76370   | 7.6           | 365         | 100     | 5,000     |
| 0946B76540   | 7.6           | 540         | 100     | 2,000     |
| 0946B78750   | 7.8           | 750         | 100     | 2,000     |
| 0946B90540   | 9.0           | 540         | 100     | 100       |
| 0946B90780   | 9.0           | 780         | 100     | 2,500     |
| 0946B1271030 | 12.7          | 1030        | 100     | 600       |

| Product Code | Diameter (mm) | Length (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|---------|-----------|
| 0946N25100   | 2.5           | 100         | 100     | 55,000    |
| 0946N26160   | 2.6           | 160         | 100     | 40,000    |
| 0946N26200   | 2.6           | 200         | 100     | 30,000    |
| 0946N36140   | 3.6           | 140         | 100     | 25,000    |
| 0946N36200   | 3.6           | 203         | 100     | 20,000    |
| 0946N36290   | 3.6           | 290         | 100     | 15,000    |
| 0946N36370   | 3.6           | 370         | 100     | 10,000    |
| 0946N45160   | 4.5           | 160         | 100     | 17,000    |
| 0946N46400   | 4.6           | 400         | 100     | 7,000     |
| 0946N48200   | 4.8           | 200         | 100     | 15,000    |
| 0946N48300   | 4.8           | 300         | 100     | 12,000    |
| 0946N48430   | 4.8           | 430         | 100     | 7,500     |
| 0946N76370   | 7.6           | 370         | 100     | 4,000     |
| 0946N78450   | 7.8           | 450         | 100     | 2,500     |
| 0946N78540   | 7.8           | 540         | 100     | 2,000     |
| 0946N78750   | 7.8           | 750         | 100     | 2,000     |
| 0946N90762   | 9.0           | 780         | 100     | 2,500     |

## CABLE TIE HOLDERS POLYAMIDE 6.6 / BLACK OR NEUTRAL



Self-adhesive tie mounts are designed to support light weight wire bundles. For heavy support, mounting hole is provided for screws.

| Product Code | Diameter (mm) | Length (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|---------|-----------|
| 0946BB20     | 19            | 19          | 100     | 30,000    |

| Product Code | Diameter (mm) | Length (mm) | Box Qty | Outer Qty |
|--------------|---------------|-------------|---------|-----------|
| 0946NB20     | 19            | 19          | 100     | 30,000    |

## CATALOGUE 2025

**MASONMATE®**  
FIXINGS FOR MASONRY

MASONMATE  
**EXTRA®**  
ETA APPROVED FIXINGS

**SERBOLT®**

**UK:** Harrison & Clough Ltd.,  
Galleon Blvd, Crossways Bus. Park,  
Dartford, Kent, DA2 6QE

**EU:** QFF Distribution Ltd.,  
24 Magna Drive, Magna Bus. Park,  
Citywest Road, Dublin, D24 FNYO



@thematerange

[materange.com](https://materange.com)